


METAL CEILING *SYSTEM*

METAL CEILING
SYSTEM

- **LINEAR** *CEILINGS*
- **TILE&PLANK** *CEILINGS*
- **OPEN DECORATIVE** *CEILINGS*

FAMELINE
THE PROFESSIONALS' VISION

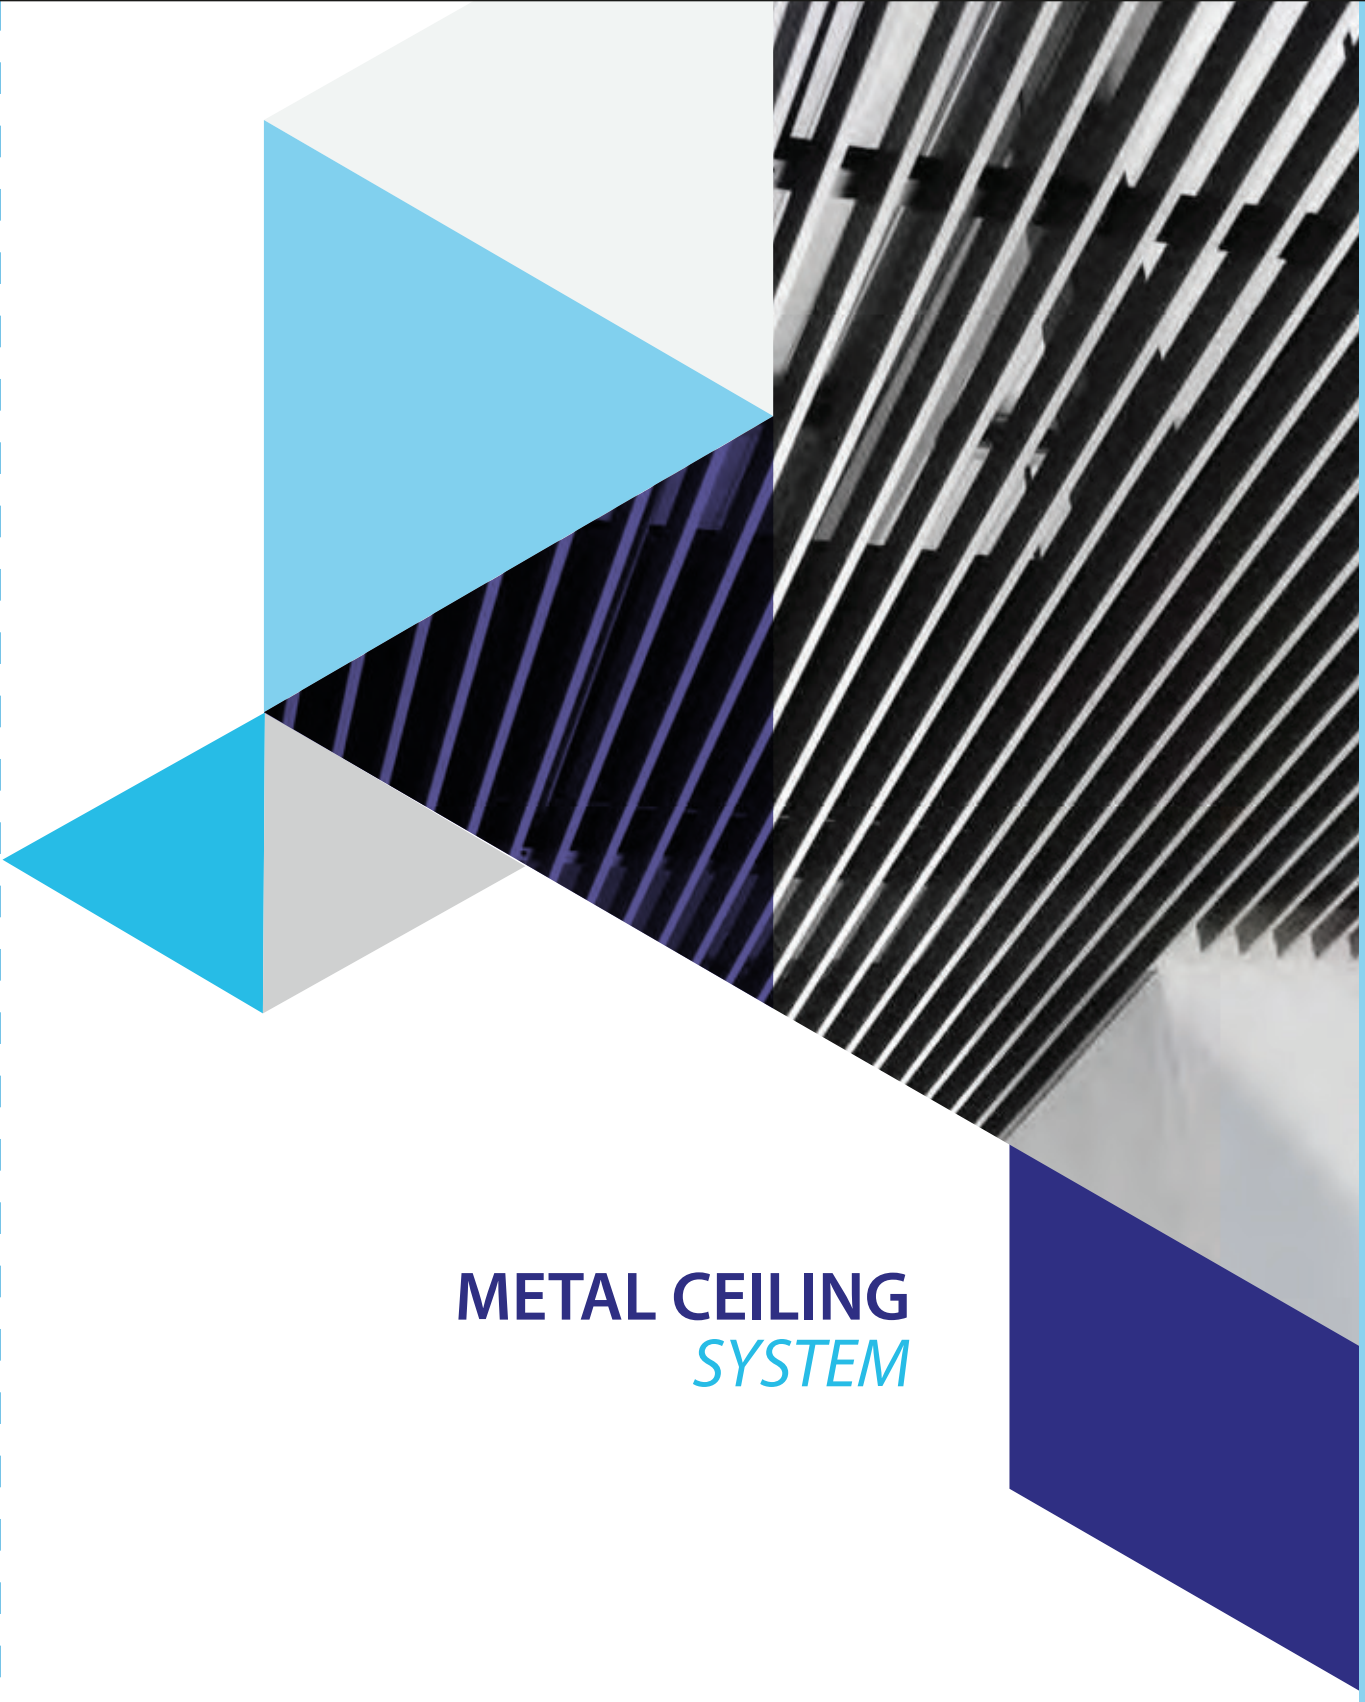

METAL *CEILINGS*





SUN LOUVER *&GRILLES*

SPECIAL *PRODUCTS*

FAMELINE PRODUCTS CO., LTD.

The leading manufacturer of architectural metal products in Thailand.

Mainly offer high quality metal ceilings, sun louvers and metal facade finishing products in several designs that fulfill the designer or the architect's decoration imaginations.

With over two decades of experience, we emphasize on high quality manufacturing of innovative products with state of the art production technology. All production processes are done in house in our factory spread over an area 8,000 square meter.

Our major customers are in several sectors from residential to Large Scale projects such as Airports, Public Transportation (both elevated and underground train stations), etc.

ANGLO JAPANESE AMERICAN REGISTRARS AJA ISO 9001 - 2000 UKAS QUALITY MANAGEMENT Reg.No. 059-A

CERT.NO. AJA00/2412

FAMELINE GROUP ALWAYS BEYOND



CONTENTS

- **VALUE OF FAMELINE METAL CEILING** 5
- **LINEAR CEILING** 6
  - 100,150,200 *F*, 100,150,200 *U* 8-9
  - 85*C* 10
  - 85*F* 11
  - 150*V* 12
  - 300*G* 13
- **TILE & PLANK CEILING** 14
  - CLIP*IN* 16
  - HOOK*ON* 17
  - LAY*IN* 18
  - T*GRID* 19
  - LINEAR*GRID* 20
  - TARTAN*GRID* 21
- **OPEN DECORATIVE CEILING** 22
  - CELL*CEILING* 24
  - EXPANDED*CEILING* 25
  - GRILLE*CEILING* 26
  - SCREEN*CEILING* 27

VALUE OF
FAMELINE METAL CEILING

- Extreme durability: The quality of production and raw materials used make our products extra durable, low maintenance and has a guaranteed life span of over a decade.
- Various alternatives: The Fameline architectural metal products feature a wide range of textures, systems, materials, colors, etc.
- High quality standard: Our design, production, and installation process abide under ISO9001 standards.
- Selective solution: The Fameline metal ceiling systems are designed to fulfill all decorative needs for maximum performance, offering new modular solutions and alternative options to other materials.
- Environmental friendly: Our ceiling materials are totally recyclable.




LINE *IT UP*



LINEAR *CEILING*

Aluminium linear ceiling is a special type of ceiling system usable for both interior and exterior application. With long stripe appearance, it can be installed in all kinds of areas. The unique lines/grooves of the ceiling can be arranged to form various never-ending, non-directional patterns and designs.

100/ 150/ 200 *F*
100/ 150/ 200 *U*
85*C*
85*F*
150*V*
300*G*

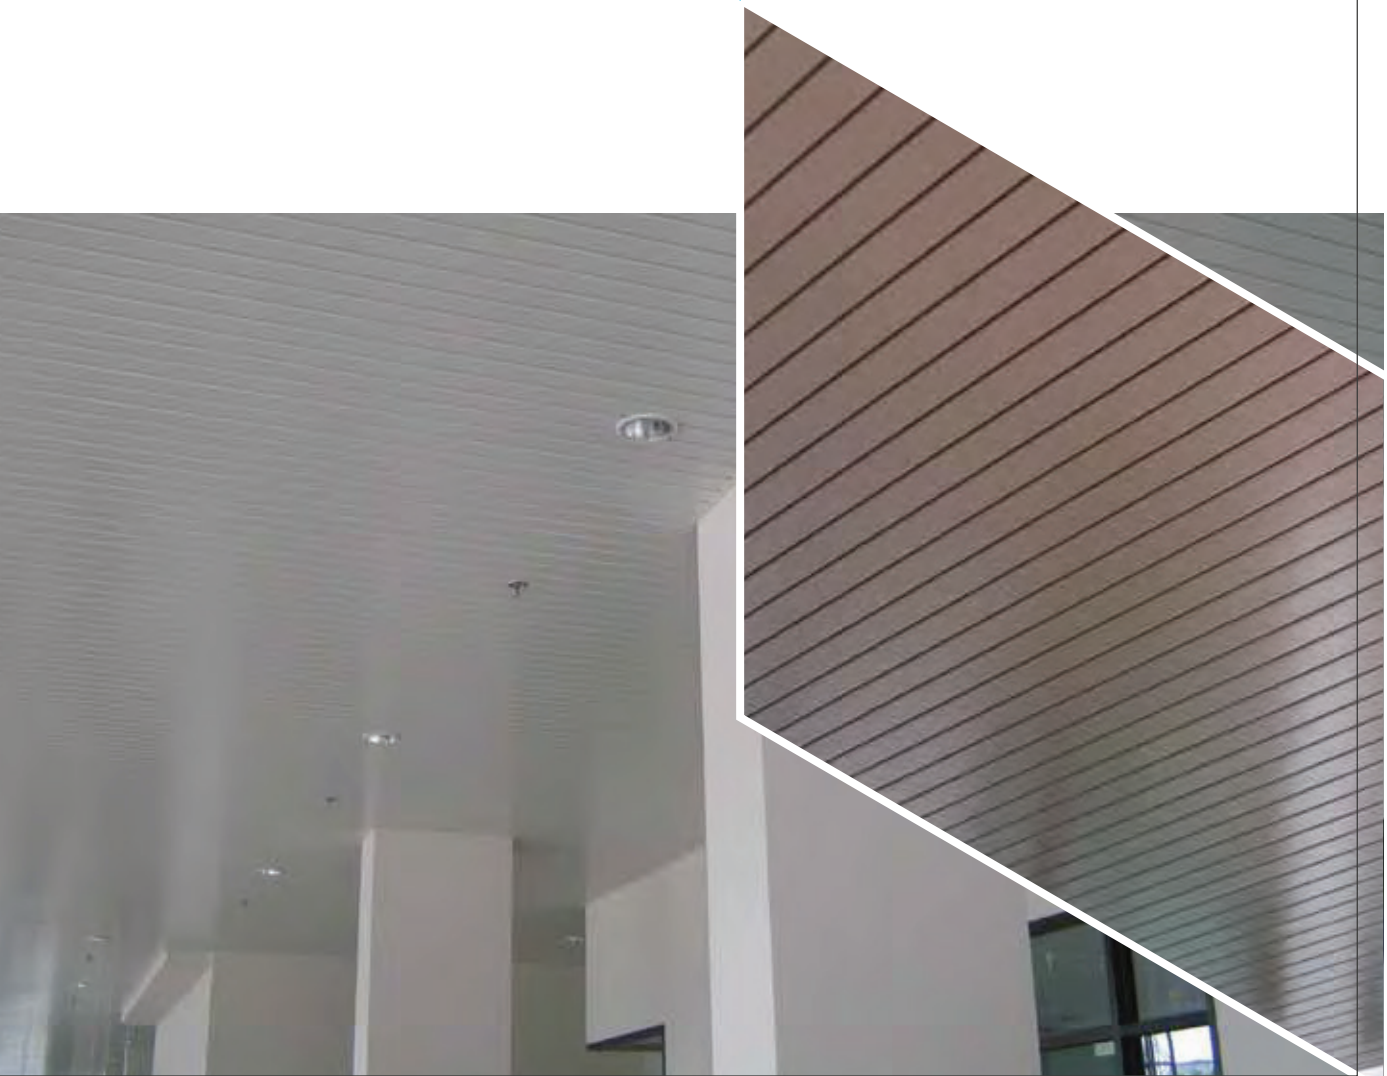



LINEAR *CEILING*

BOX *SERIES*


100/150/200 *F (F-PROFILE)*

Aluminium linear ceiling with angled edge and 15mm groove. The tile comes with 85mm, 135mm. and 185mm. sizes. The F-shaped tile highlights the groove for the closed ceiling system that aims to create patterns of lines in different directions. The closed system prevents liquid from leaky air conditioning unit and conceals untidiness above the ceiling. It comes with special "Multi-Carrier" mounting bracket that allows installation of all kinds of linear ceiling tiles with different sizes and patterns, fulfilling various creative needs. Suggested areas: large hall, exterior eaves, corridor, all types of room

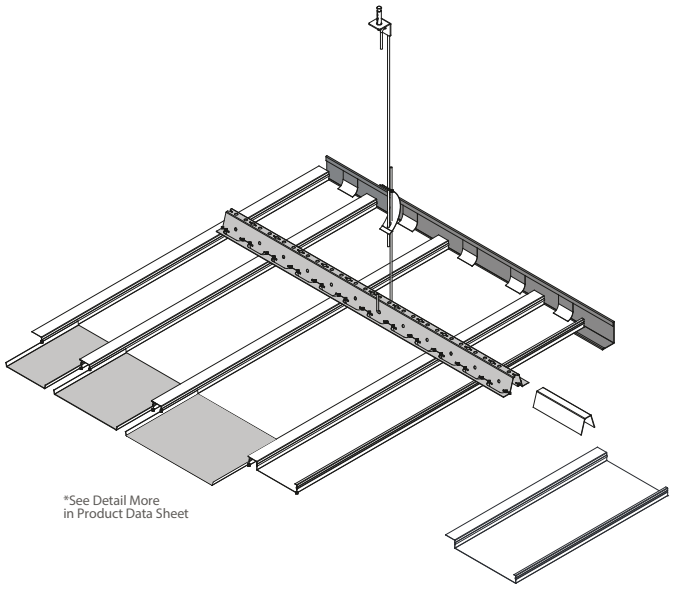



With 15 mm. Gap

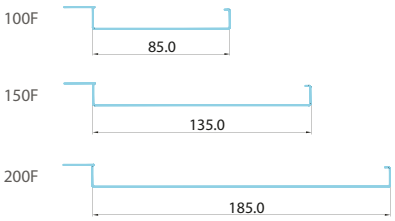


PANEL SIZES:


Dimension:	85 (135,185) mm. x 15 mm.
Thickness :	0.6 mm. (Thk.)
Length :	Max. 6 m.

SUSPENSION MATERIAL:


Material :	Galvanized Steel (0.5 mm. Thk.)
	Aluminium (0.9 mm. Thk.)
Length :	3.00 m.



Pattern : Repetition Panel



Pattern : Multi-Size Panel


Pattern : Multi-Profile Panel

Various Panels Size with Multi-Carrier (F-Profile)



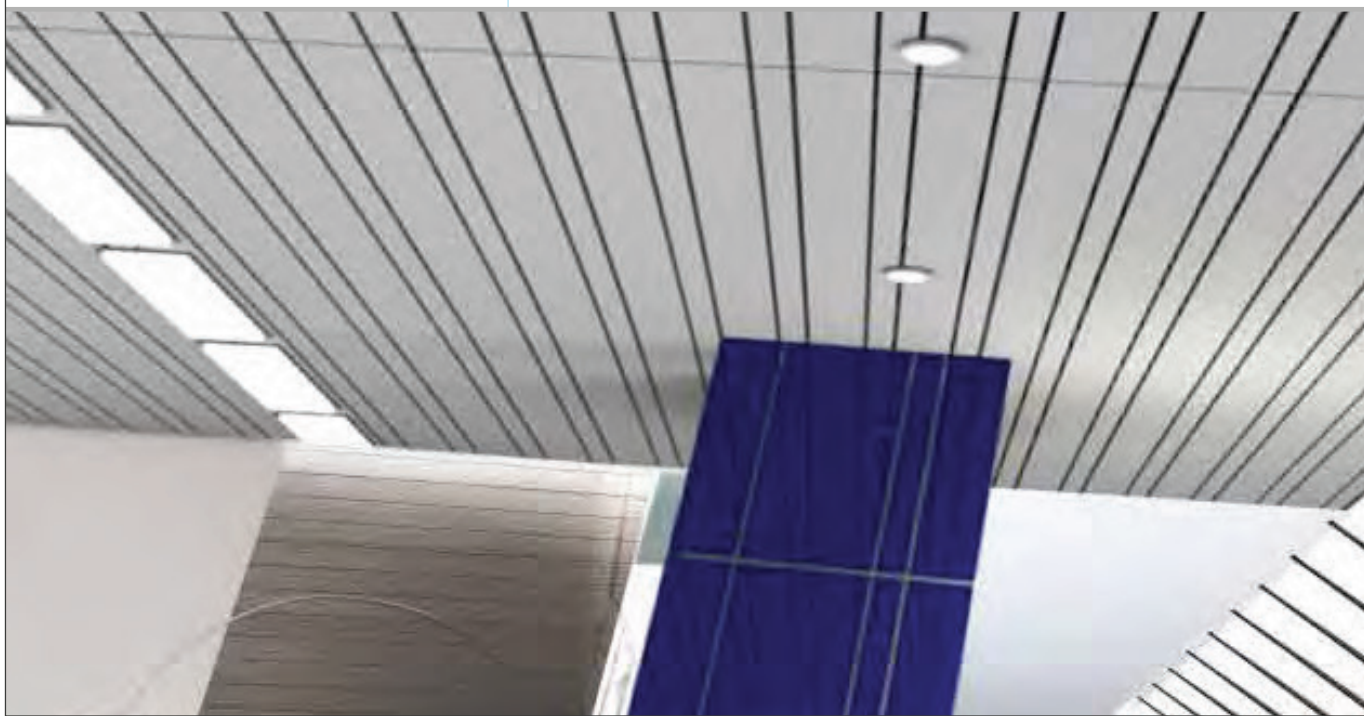

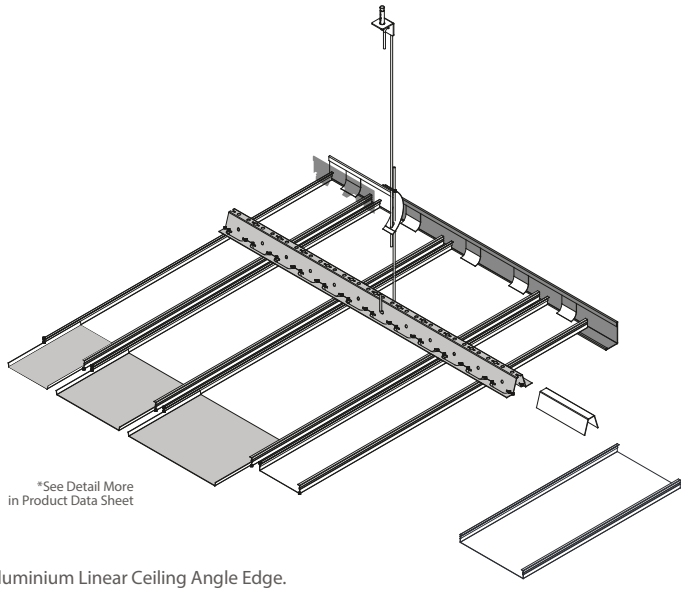

"Aluminium Linear Ceiling Angle Edge.
Width 85 mm. , 135 mm. and 185 mm."


LINEAR *CEILING*

BOX *SERIES*


100/150/200 *U (U-PROFILE)*


Aluminium linear ceiling with angled edge and 15mm groove. The U-shaped type comes with 85mm, 135mm and 185mm sizes. The groove is spaced out to highlight lines and patterns for beautiful look. This open ceiling system is suitable for air ventilation purpose. With the special type of mounting bracket "Multi-Carrier", you can use all kinds of linear ceiling tiles with different sizes to install in various patterns, so you can design all you want. (Suggested areas: large halls, exterior eaves, corridor, all types of room)

PANEL SIZES:		SUSPENSION MATERIAL:	
Dimension:	85 (135,185) mm. x 15 mm.	Material :	Galvanized Steel (0.5 mm. Thk.)
Thickness :	0.6mm. (Thk.)		Aluminium (0.9 mm. Thk.)
Length :	Max. 6 m.	Length :	3.00 m.




With 15 mm. Gap






Pattern : Repetition Panel




Pattern : Multi-Size Panel



Pattern : Multi-Profile Panel


Various Panels Size with Multi-Carrier (U-Profile)



LINEAR *CEILING*


85*C*


Aluminium linear ceiling system with round edge, 85mm. wide line, available for both edge-to-edge installation to conceal untidiness of the above ceiling systems and 10mm. groove spacing for ventilation. (Suggested areas: large hall, outside eaves, corridor, all types of room)

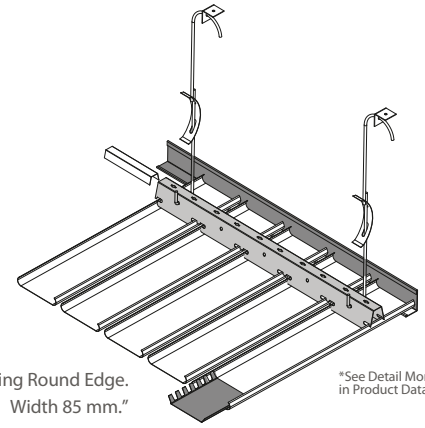


"Aluminium Linear Ceiling Round Edge. Width 85 mm."


*See Detail More in Product Data Sheet





85C With Out Gap





85C 10 mm. Gap


PANEL SIZES:

Dimension:	85 mm. x 15 mm. x 0.5 mm. (Thk.)
Length :	Max. 6 m.

SUSPENSION MATERIAL:

Material :	Galvanized Steel (0.5 mm. Thk.)
	Aluminium (0.9 mm. Thk.)
Length :	2.40 m.




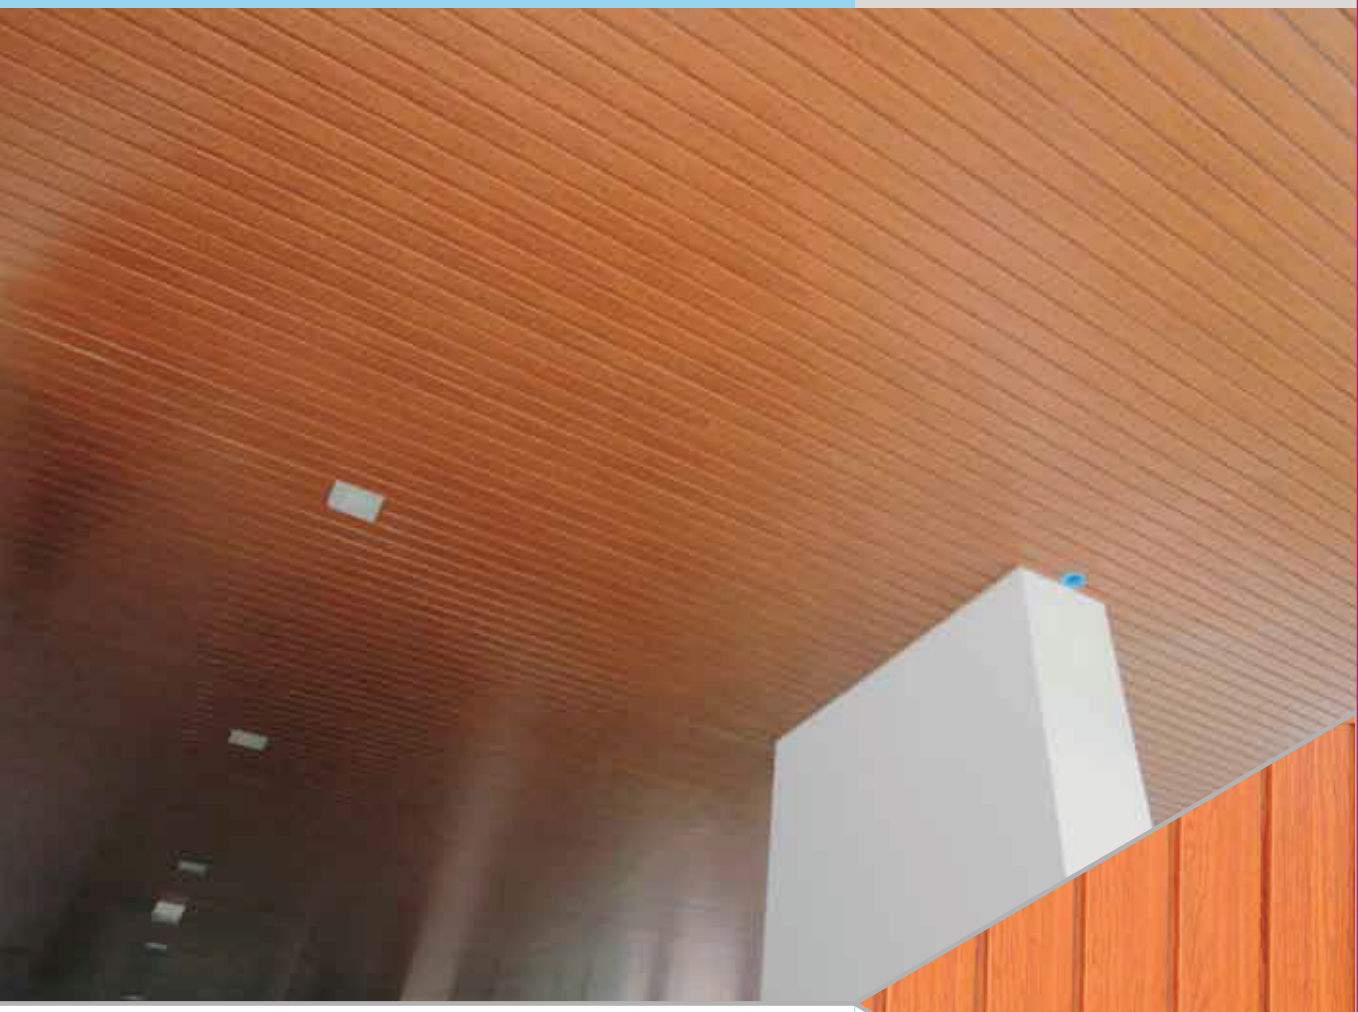


LINEAR *CEILING*


85*F*

Aluminium linear ceiling with straight edge. The 85mm.-wide line and 10mm. F-shaped groove allows the user to install the ceiling in various patterns and directions. The closed style ceiling can prevent seepage of leaked water /Airconditioning covering the air conditioner pipes and concealing the untidiness of the systems above.

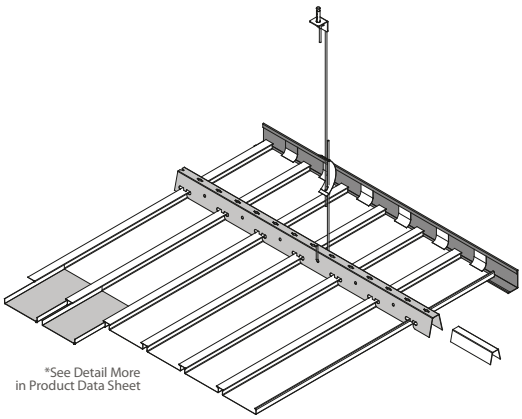

"Aluminium Linear Ceiling Angle Edge.
Width 85 mm."





PANEL SIZES:

Dimension:	85 mm. x 15 mm. x 0.5 mm. (Thk.)
Length :	Max. 6 m.


SUSPENSION MATERIAL:

Material :	Galvanized Steel (0.5 mm. Thk.)
	Aluminium (0.9 mm. Thk.)
Length :	2.40 m.


LINEAR *CEILING*


150V

Aluminium linear ceiling with V-shaped Berelled edge, 150mm. wide panel. With the V-lock system, the groove is smaller while the tiles surface is bigger. This system offers wider and tidier looking ceiling with less seam.

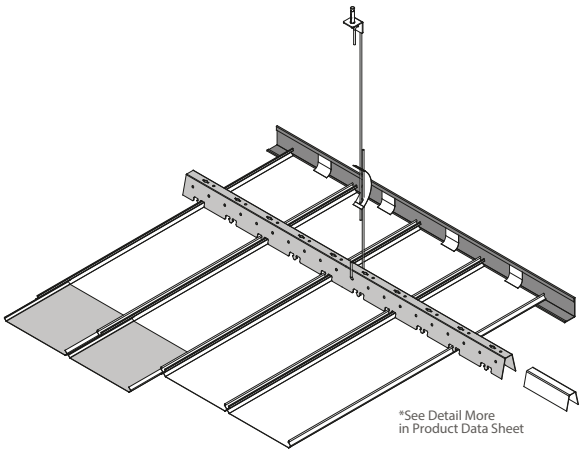


"Aluminium Linear Ceiling V-Shape type.
Width 150 mm."







V-Groove GAP

PANEL SIZES:		SUSPENSION MATERIAL:	
Dimension:	150 mm. x 15 mm. x 0.65mm. (Thk.)	Material :	Galvanized Steel (0.5 mm. Thk.)
Length :	Max. 6 m.		Aluminium (0.9 mm. Thk.)
		Length :	2.40 m.

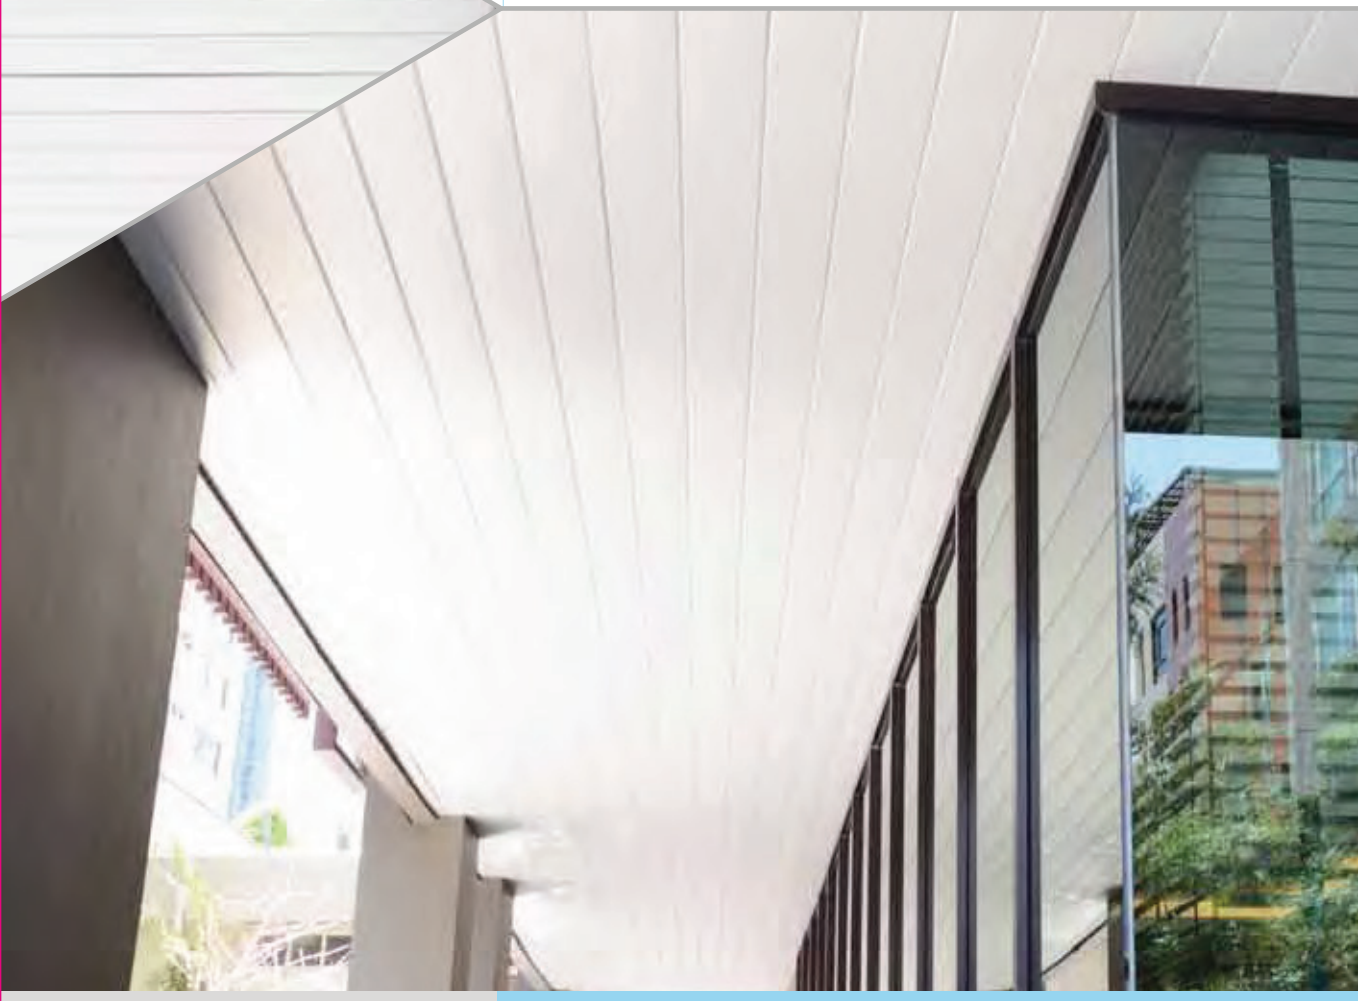


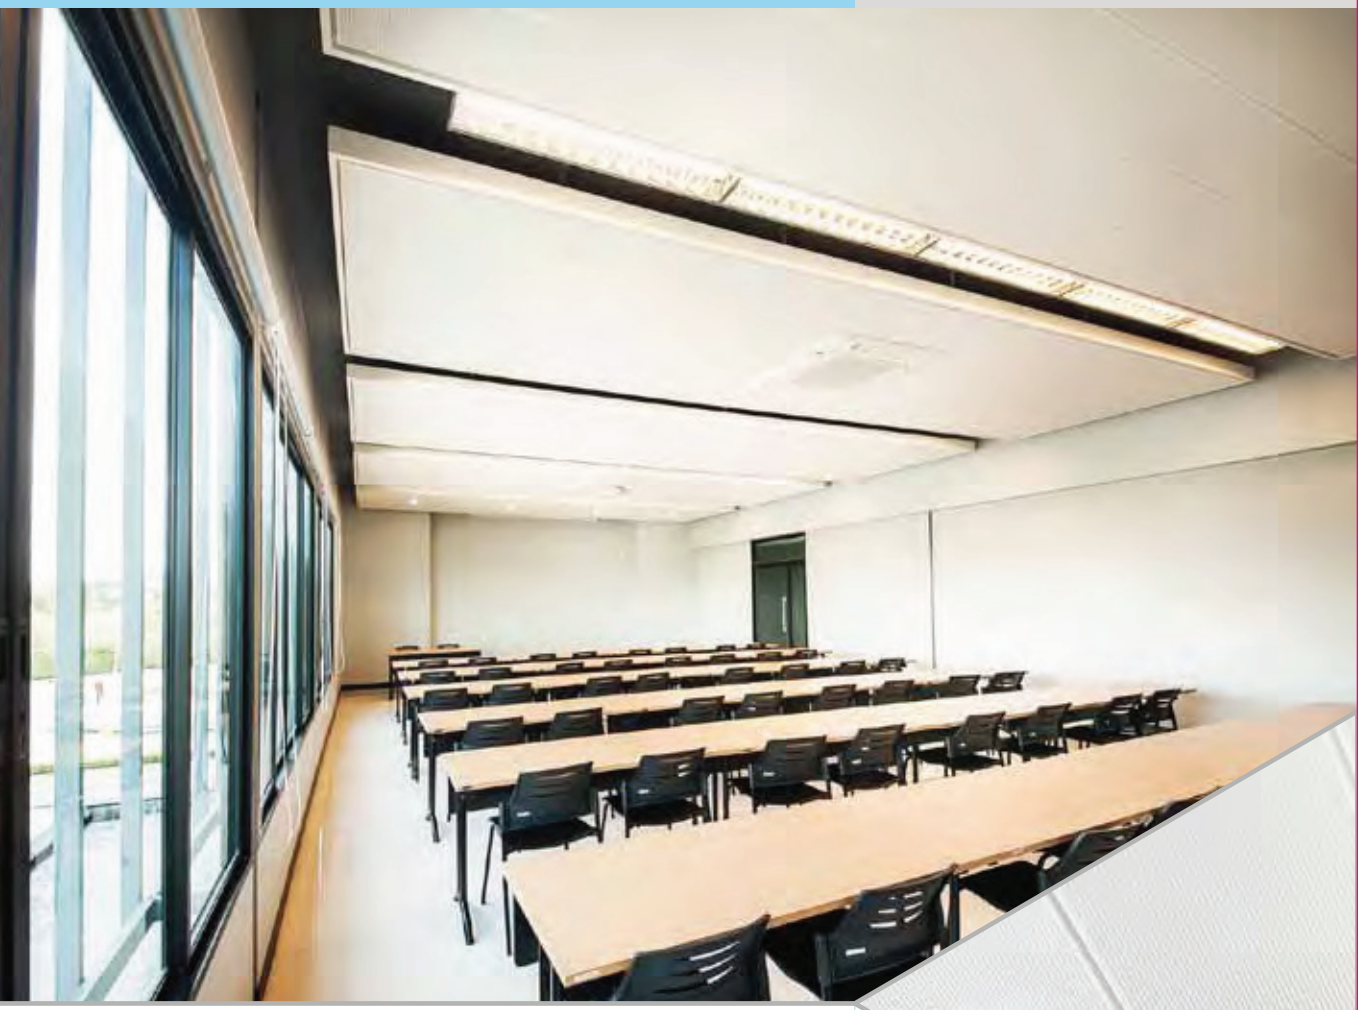


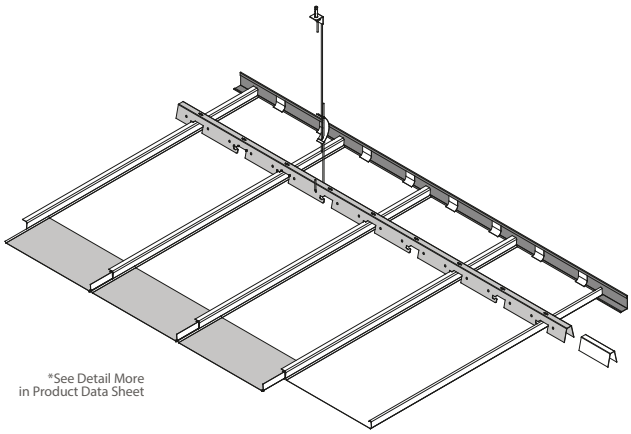

*See Detail More
in Product Data Sheet

"Aluminium Linear Ceiling G-Shape type.
Width 300 mm."






LINEAR *CEILING*

300*G*

Aluminium linear ceiling with G-shaped edge 300mm. wide line. This special system offers extra-wide surface with minimum seam. Tidy looking, trouble-free and suitable for installation in large areas.



STANDARD PATTERN A
2.6 mm Diameter Holes
Square pitch : 5.55x5.55 mm.
Open area : 16%
NRC(ASM C423-90a) = 0.80
*Panel can perforated on standard pattern A.


PANEL SIZES:

Dimension:	300 mm. x 25 mm. x 0.7 mm. (Thk.)
Length :	Max. 6 m.


SUSPENSION MATERIAL:

Material :	Galvanized Steel (0.5 mm. Thk.)
	Aluminium (0.9 mm. Thk.)
Length :	2.40 m.


TILE WITH
NOISE PERFORMANCE




PATTERN A
2.6 mm Diameter Holes
Square pitch : 5.55x5.55 mm.
Open area : 16%
NRC(ASM C423-90a) = 0.80




PATTERN B
1.8 mm Diameter Holes
Square pitch : 5.0x5.0 mm.
Open area : 21%
NRC(ASM C423-90a) = 0.75




PATTERN C
10 mm Diameter Holes
Square pitch : 30.0x30.0 mm.
Open area : 9%



PATTERN D
10 mm Diameter Holes
Square pitch : 30.0x30.0 mm.
Open area : 11%



PATTERN E
10 mm Diameter Holes
Square pitch : 30.0x30.0 mm.
Open area : 17%



PATTERN F
20 mm Diameter Holes
Square pitch : 40.0x40.0 mm.
Open area : 39%


PERFORATION PATTERN
FOR ACOUSTIC PERFORMANCE

Perforation Pattern Standard by Fameline.
*Not available in 0.5 mm aluminium.

TILE & PLANK *CEILING*

Square and rectangle mondule aluminum ceilings which comes in plain and perforated type. Perforated tiles come with the acoustic feature, the ceiling can reduce sound reflections and improve sound quality in the installed area. Suitable for large areas that require sound quality control. Also, with a wide range of special installation types,the ceiling not only offers optional decorative shapes and patterns, but also easy and quick installation and removal of the tiles. Convenient for system check, maintenance and cleaning.

CLIP*IN*
HOOK*ON*
LAY*IN*
T*GRID*
LINEAR*GRID*
TARTAN*GRID*

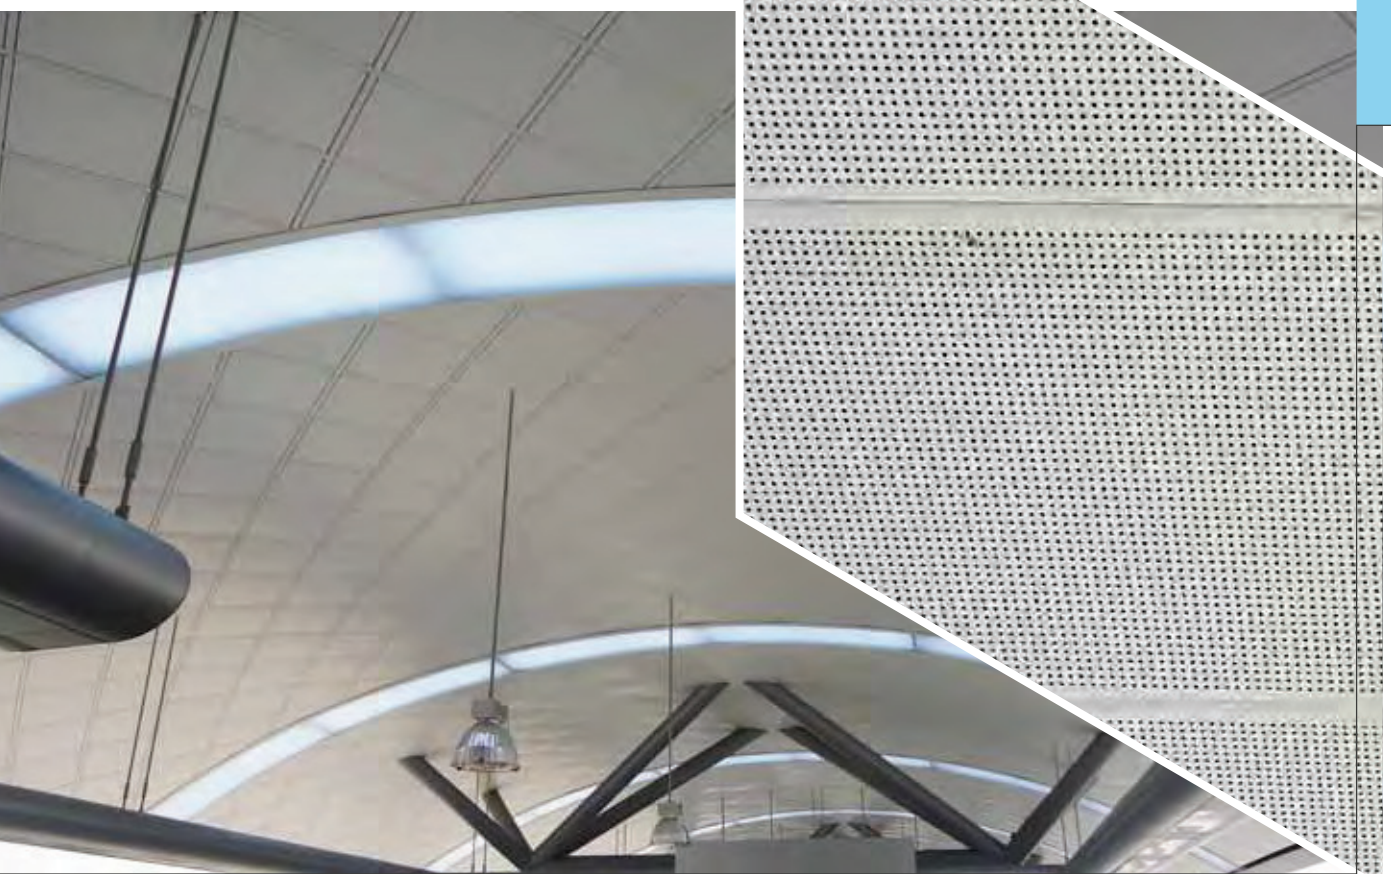


TILE & PLANK *CEILING*

CLIP*IN*


SUSPENSION SYSTEM

Square or Rectangle aluminium ceiling with clip-lock installation system that is easy, quick and durable against battering wind. Usable for semi-outdoor areas. This system offers tidy look with V-shaped groove. It can be arranged to create various decorative patterns for an aesthetic appearance. Suitable for all types of interiors applications. (Suggested areas: office building, large hall, shopping mall, classroom, sound-controlled room, interior or semi-exterior corridor.


VARIOUS DESIGN PANEL




Pattern : 60x60 + 60x60



Pattern : 60x60 + 60x60




Pattern : 60x60 + 60x120

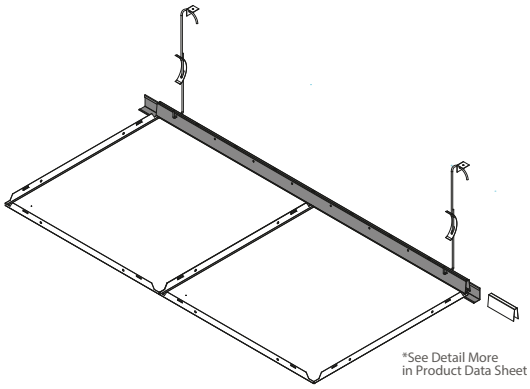

*See Detail More in Product Data Sheet

"Aluminium Tile&Plank Ceiling, Clip-in System."




V-Groove

PANEL SIZES:

Dimension:	300 x 600, 600 x 600, 600 x 1200 mm. x 26.5 mm.
Depth :	0.7 mm. (Thk.)

SUSPENSION MATERIAL:

Material :	Galvanized Steel (0.5 mm. Thk.)
Length :	4.00 m.

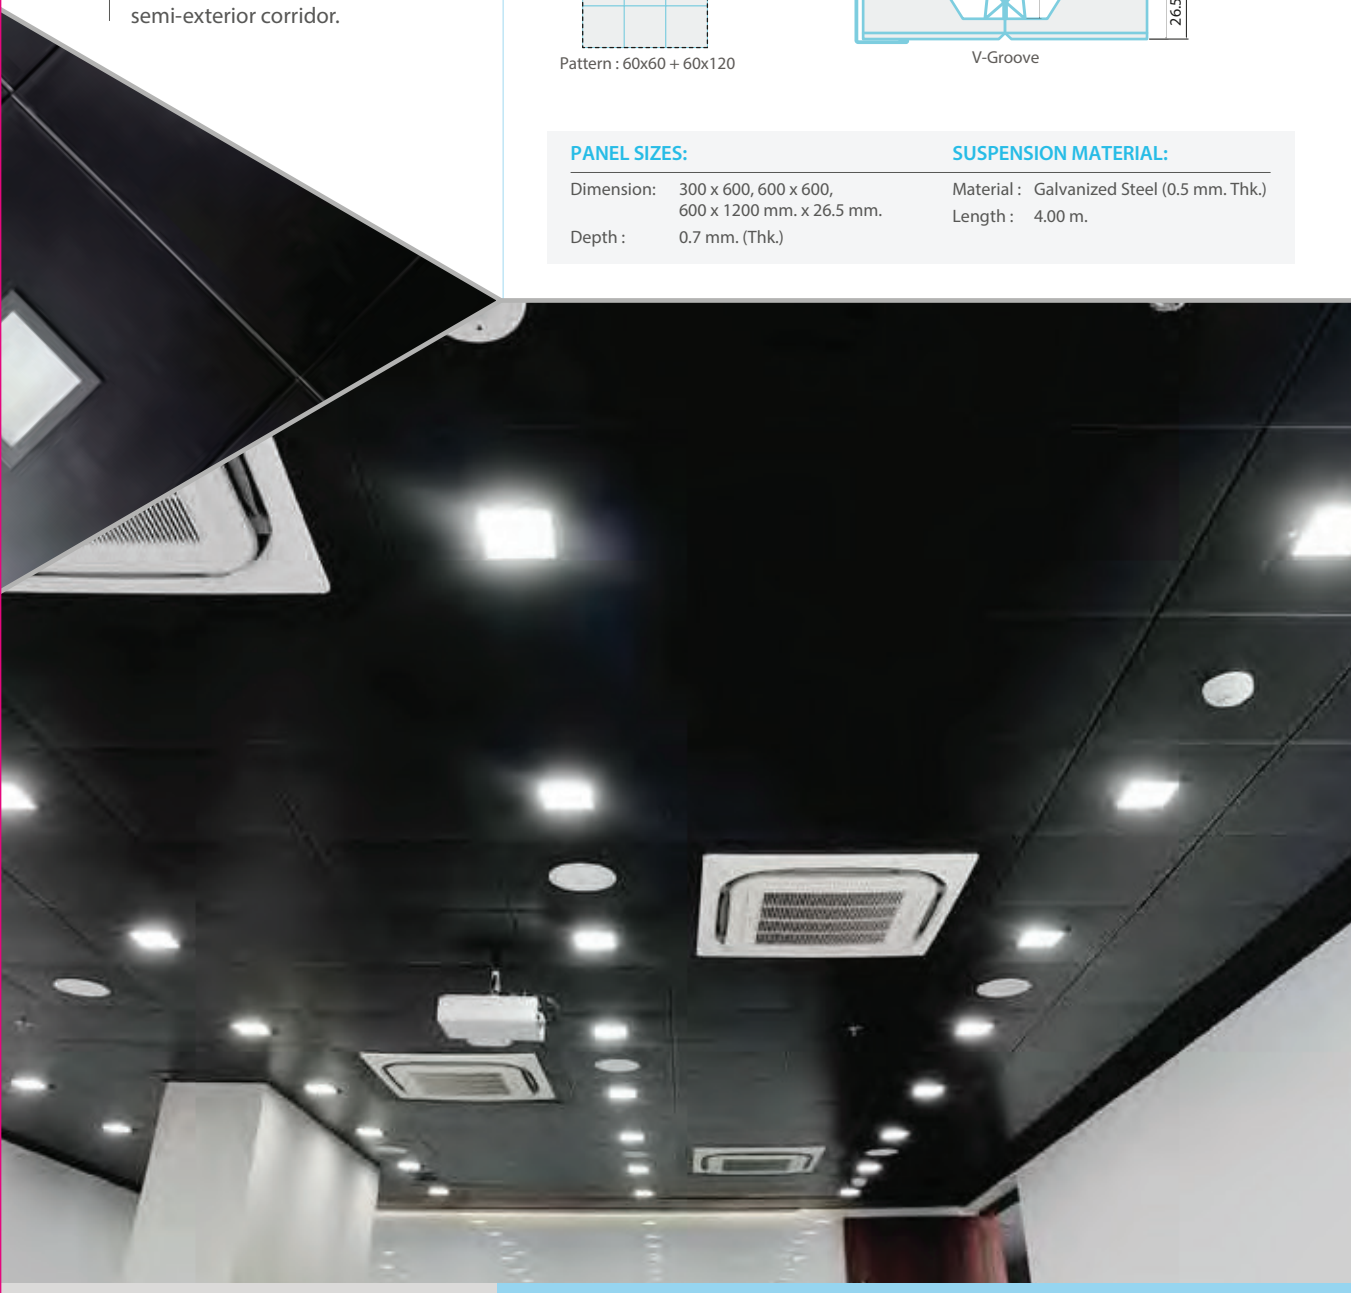




TILE & PLANK *CEILING*

HOOK*ON*


SUSPENSION SYSTEM


Square or Rectangle aluminum ceiling system with easy and accurate installation that conceals the structure frame. The edge-to-edge installation offers seamless appearance and smooth surface, suitable for all types of interior areas. With the extra-robust structure, the tiles size can be increased in order to reduce tile joints. (Suggested areas: office building, large hall, shopping mall, meeting hall, interior corridor)

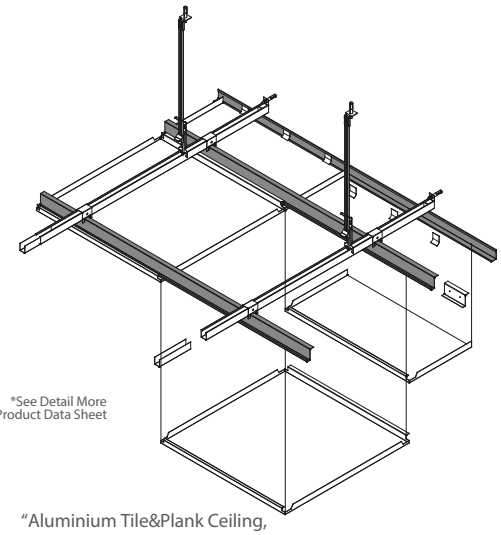


*See Detail More in Product Data Sheet

"Aluminium Tile&Plank Ceiling, Hook-on System."






Pattern : 30x60 + 60x60



Pattern : 30x60 + 60x60 + 60x120



Pattern : 60x60 + 60x120 (Split Line)

PANEL SIZES:

Dimension :	300 x 600, 600 x 600 mm. 600 x 1200 mm. x 25 mm.
Depth :	0.7 mm. (Thk.)

SUSPENSION MATERIAL:


Material :	Galvanized Steel Z Profile Fixed (0.5 mm. Thk.)
Length :	2.40 m.

TILE & PLANK *CEILING*

LAY*IN*


SUSPENSION SYSTEM

Square or Rectangle aluminium ceiling with easy and quick installation thanks to the T-Bar suspension system. This system allows quick removal for system check and maintenance through the tile spacing that reveals the structure, it can be used for decorative purpose that highlights the lines of the seam. Also, it offers two optional groove depths of 8mm. and 12mm., offering deeper and various dimensions to the design. (Suggested areas: office building, large hall, sound-controlled room, machinery room)

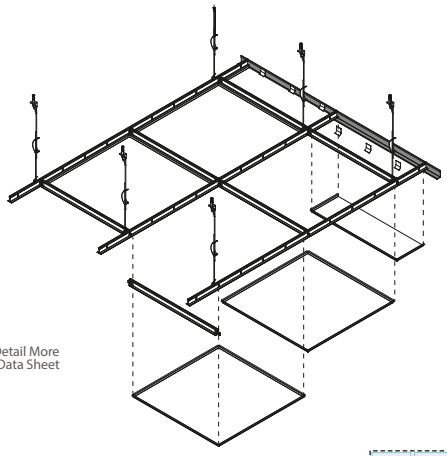


*See Detail More in Product Data Sheet

"Aluminium Tile&Plank Ceiling, Lay-in System (T-Bar)."




T-Bar Gap




T-Bar Gap

Depth : 8 mm.



Pattern : 60x60 + 60x60

Depth : 12 mm.



Pattern : 60x60 + 60x120


PANEL SIZES:


Dimension:	600 x 600, 600 x 1200,
Depth :	0.7 mm. (Thk.)
Perforation:	Pattern A, B, C, D, E

SUSPENSION MATERIAL:

Material :	Galvanized Steel T-Bar (0.7 mm. Thk.) length = 3.60 m.
	Aluminium T-Bar (1.2 mm. Thk.) Length = 6.00 m.




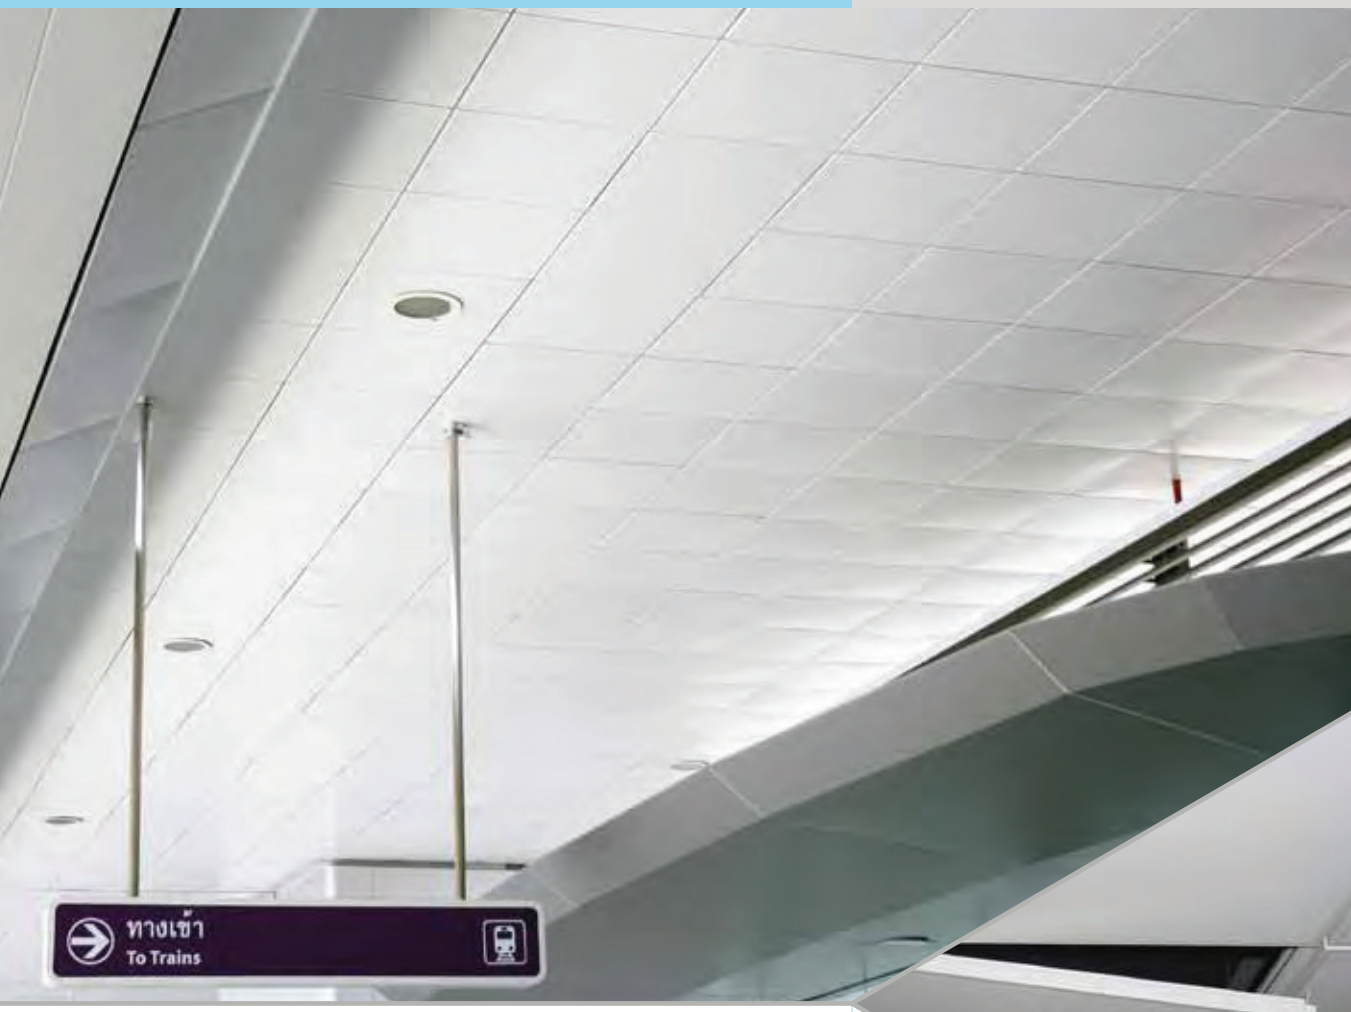


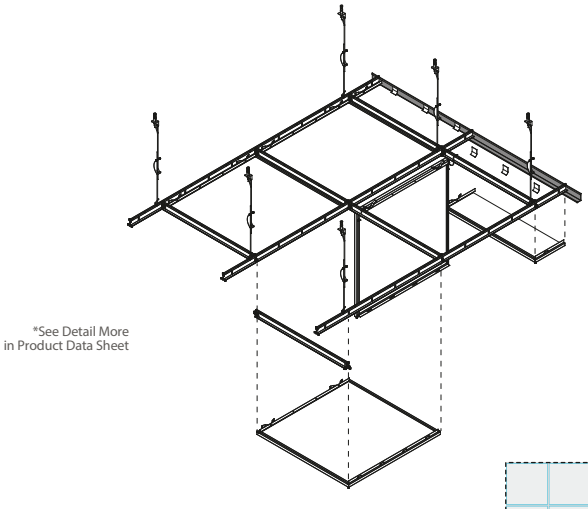


*See Detail More in Product Data Sheet

"Aluminium Tile&Plank Ceiling, Spring Lock System. "





Pattern : 60x60 + 60x60



Pattern : 60x60 + 60x120

TILE & PLANK *CEILING*

TGRID

SUSPENSION SYSTEM

Square or Rectangle aluminum ceiling system with the spring lock system, the tiles can be installed and opened easily without using tools while maintaining the strength and beauty. The 10mm groove creates multi-dimensional appearance with appealing patterns. (Suggested areas: office building, hospital, large hall, sound-controlled room, interior corridor, all types of room)

PANEL SIZES:

Dimension :	300 x 600, 600 x 600 mm. 600 x1200 mm. x 10 mm.
Depth :	0.7 mm. (Thk.)

SUSPENSION MATERIAL:


Material :	Galvanized Steel T-Frame (0.7 mm. Thk.)
Length :	3.60 m.

TILE & PLANK *CEILING*

LINEAR*GRID*


SUSPENSION SYSTEM

A Special aluminum ceiling system with linear paralleled suspension structure and extra-long tiles, up to 2 meters, installed in-between the grid. This system is strong and beautiful, offering long decorative lines and a unique dimension of design. This system is designed for easy opening without removing the tiles, facilitating the maintenance work in the ceiling cavity (optional). (Suggested areas: office building, shopping mall, airport, large hall)

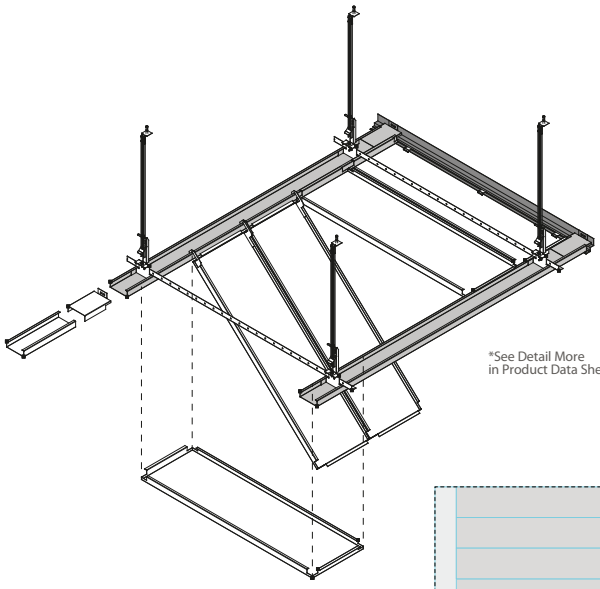


*See Detail More in Product Data Sheet

"Aluminium Tile&Plank Ceiling, Linear Grid System."

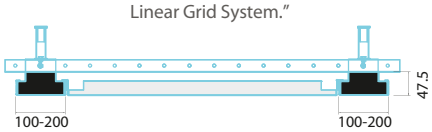

Panel 300x2000 mm.




Panel 400x2000 mm.

PANEL SIZES:		SUSPENSION MATERIAL:	
Dimension:	300 x 2000 x 30 mm. 400 x 2000 x 30 mm.	Linear Grid :	Galvanized Steel C-Profile Fiwed 100 x 2400, 200 x 2400 mm.
Depth :	0.7 mm. (Thk.)		1.20 m. (Thk)






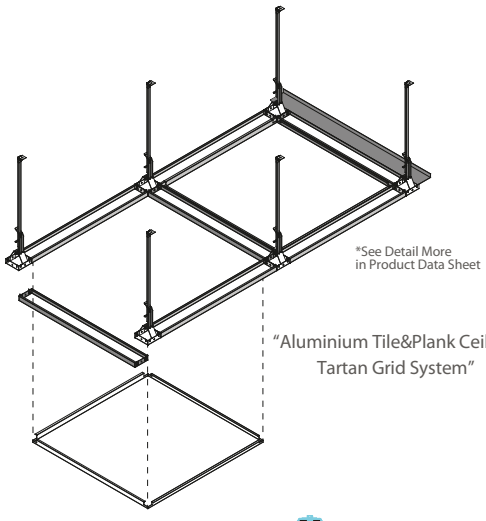

"Aluminium Tile&Plank Ceiling,
Tartan Grid System"



VARIOUS DESIGN PANEL

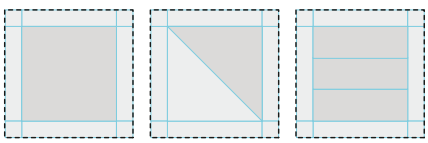

TILE & PLANK *CEILING*


TARTAN*GRID*

SUSPENSION SYSTEM

A Special Square aluminum ceiling system revealing the suspension grid structure. With extra-large square modules, the ceiling is robust, beautiful and can be arranged in various patterns. The installation system is designed to enable easy opening of the tiles, facilitating easy maintenance in the area above the ceiling. (Suggested areas: office building, shopping mall, airport, large hall)

PANEL SIZES:		SUSPENSION MATERIAL:	
Dimension :	1000 x 1000 mm. x 30 mm.	Connector:	100x100, 200x200 (1.0 mm. Thk.)
Depth :	0.7 mm. (Thk.)	Hook Linear Grid :	Galvanized Steel 1000x1000, 1200x1200 (1.0 mm. Thk.)


AIRY AND *SCREEN*

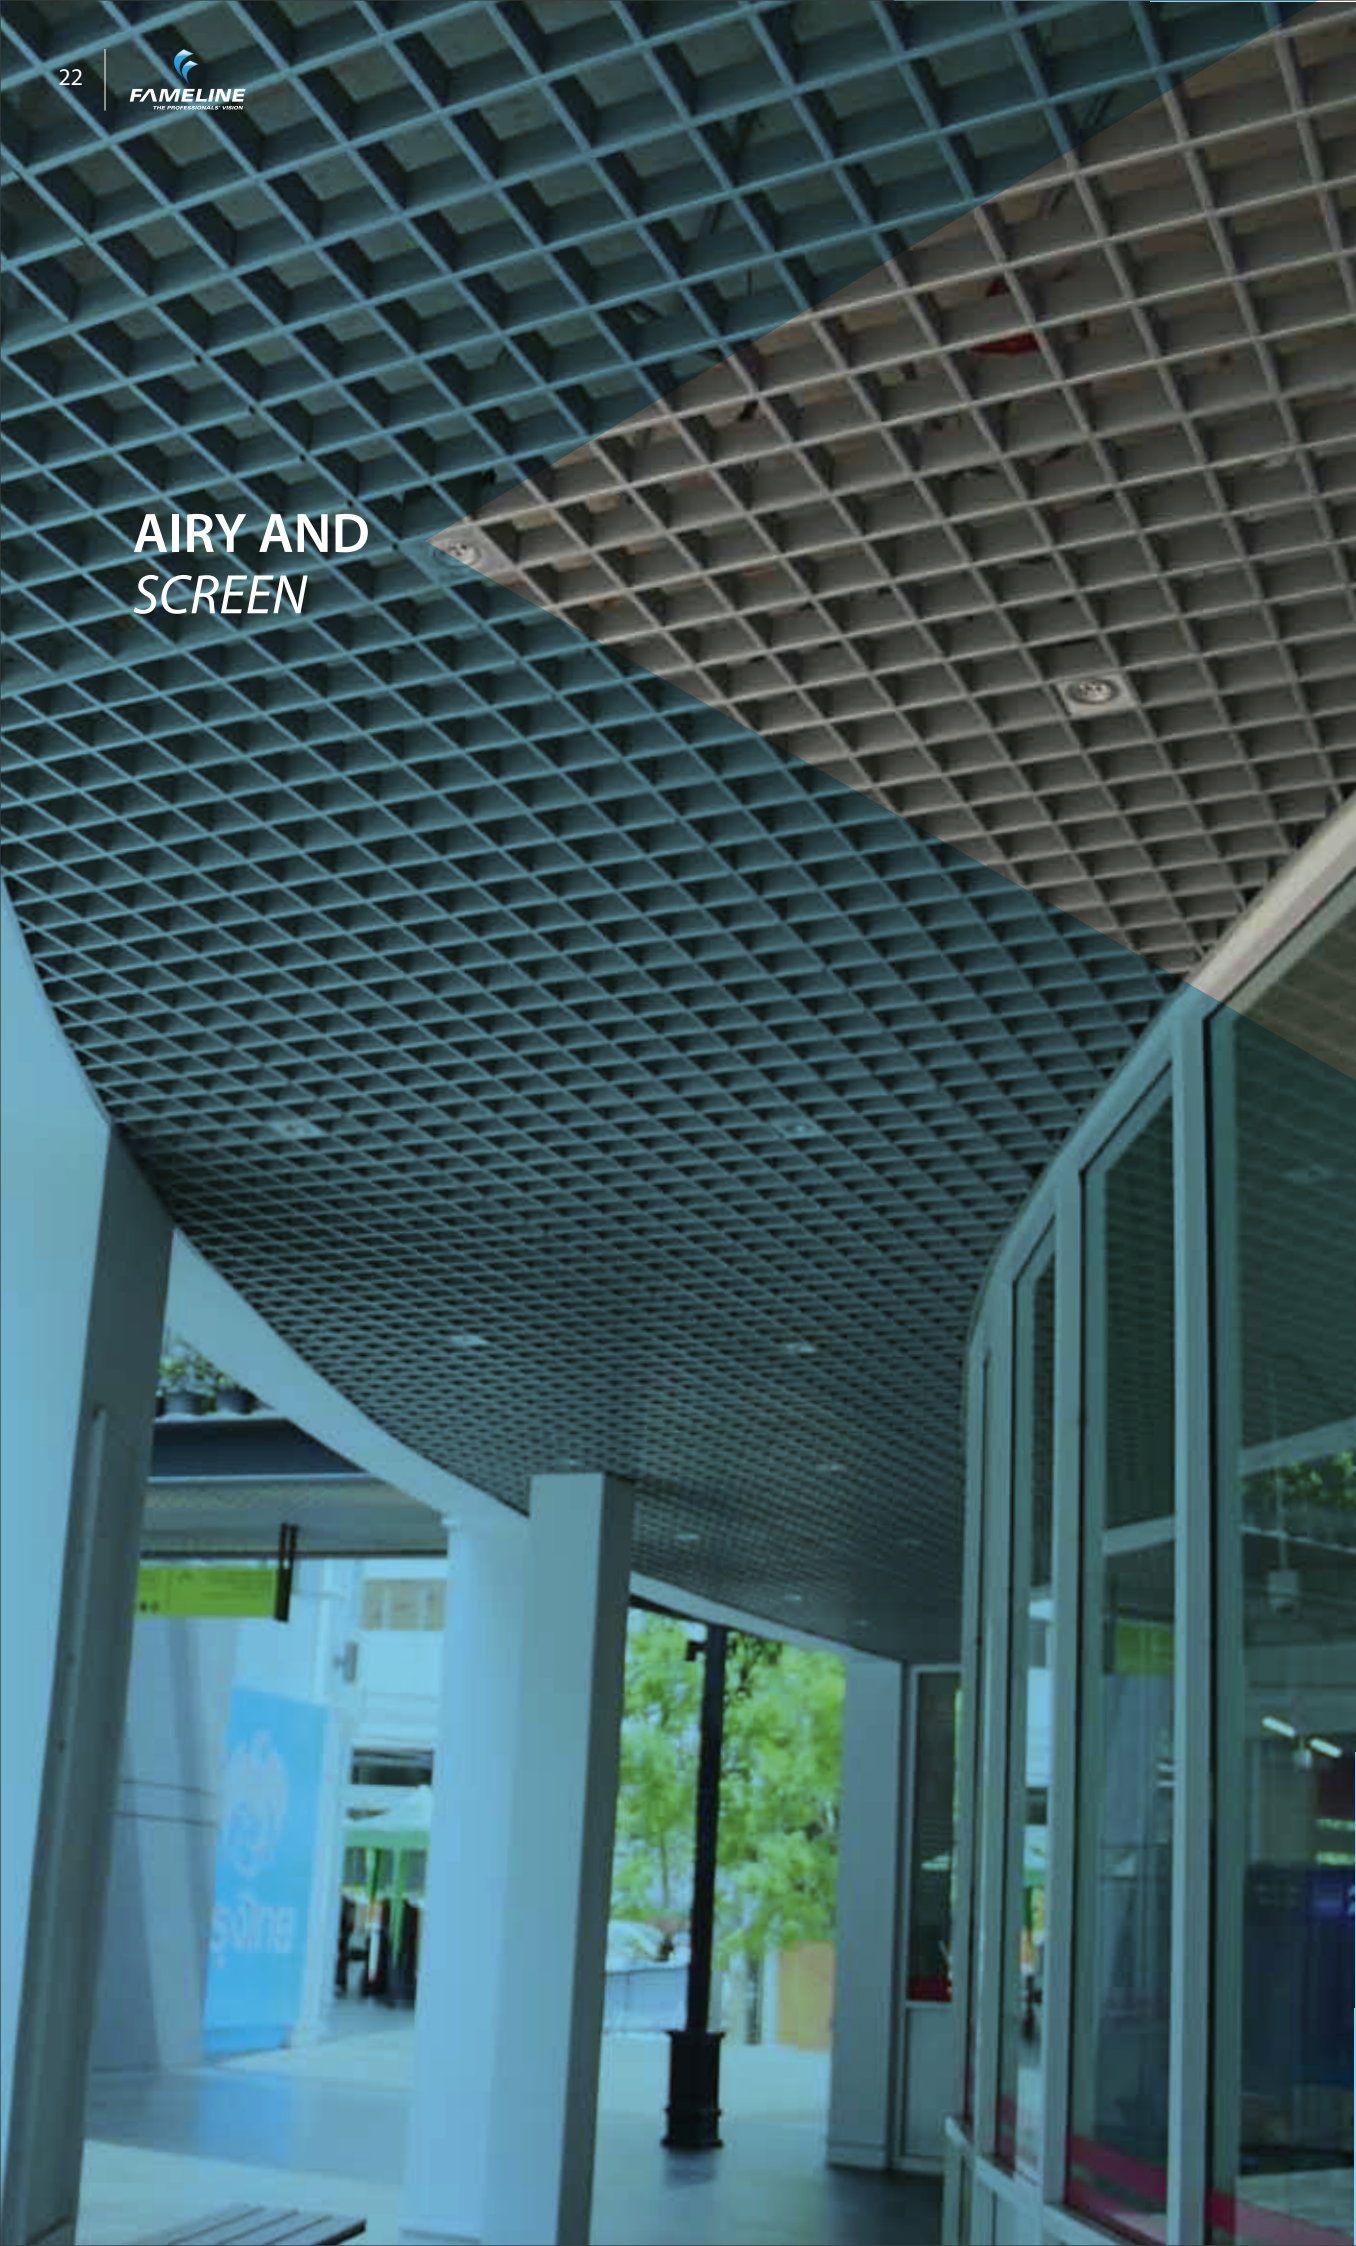

OPEN DECORATIVE *CEILING*

Aluminum open ceiling system offers a wide range of decorative options. It offers a sense of sparse and airy atmosphere while still helping to conceal the untidiness of the systems above the ceiling, creating unique and innovative design concepts.

CELL*CEILING*
EXPANDED*CEILING*
GRILLE*CEILING*
SCREEN*CEILING*

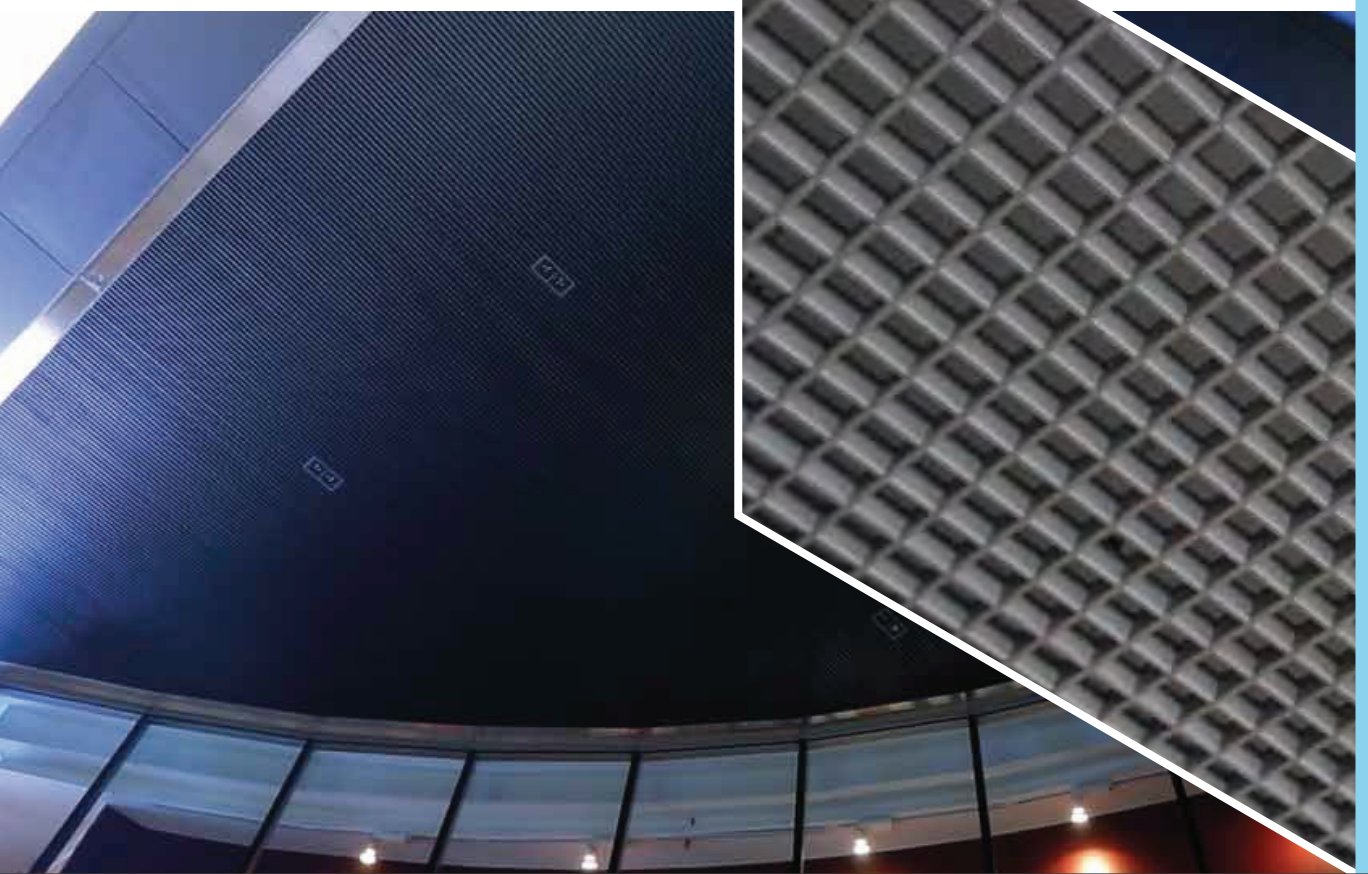


OPEN DECORATIVE *CEILING*


CELL

CEILING

SUSPENSION SYSTEM

Aluminum open ceiling system with square cells that can be installed continuously without joints. Suitable for all types of areas. Available in various optional cell sizes, every point of the ceiling can be opened without special tools and maintenance. (Suggested areas: shopping malls, office building, large hall, interior corridor, exterior eaves)

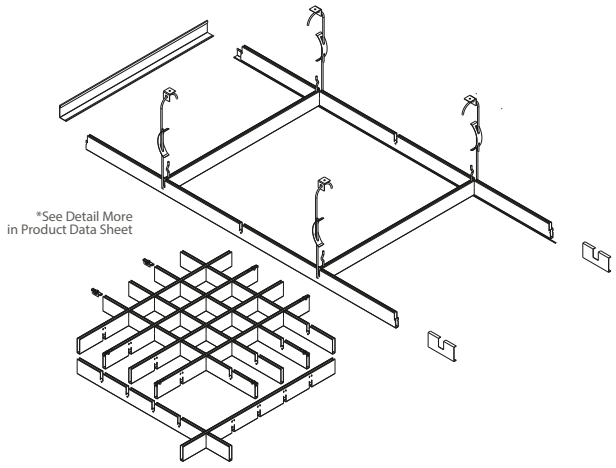

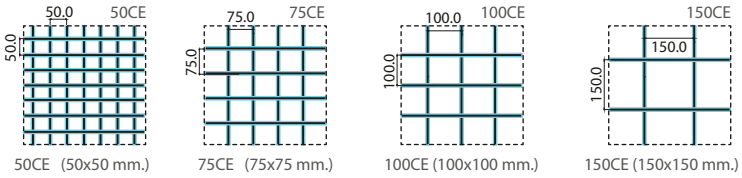


50CE (50x50 mm.) 75CE (75x75 mm.) 100CE (100x100 mm.) 150CE (150x150 mm.)


PANEL SIZES:

Dimension:	600 x 600 mm.
Depth :	0.5 mm. (Thk.)
Length :	600 -1200 mm.

SUSPENSION MATERIAL:

Main & Cross Runner :	Aluminium Extrusion 10 x 50 mm. x 0.8 mm.(Thk.) or Aluminium Roll Formed 10 x 50 mm. x 0.5 mm.(Thk.)
Length :	6.00 m.

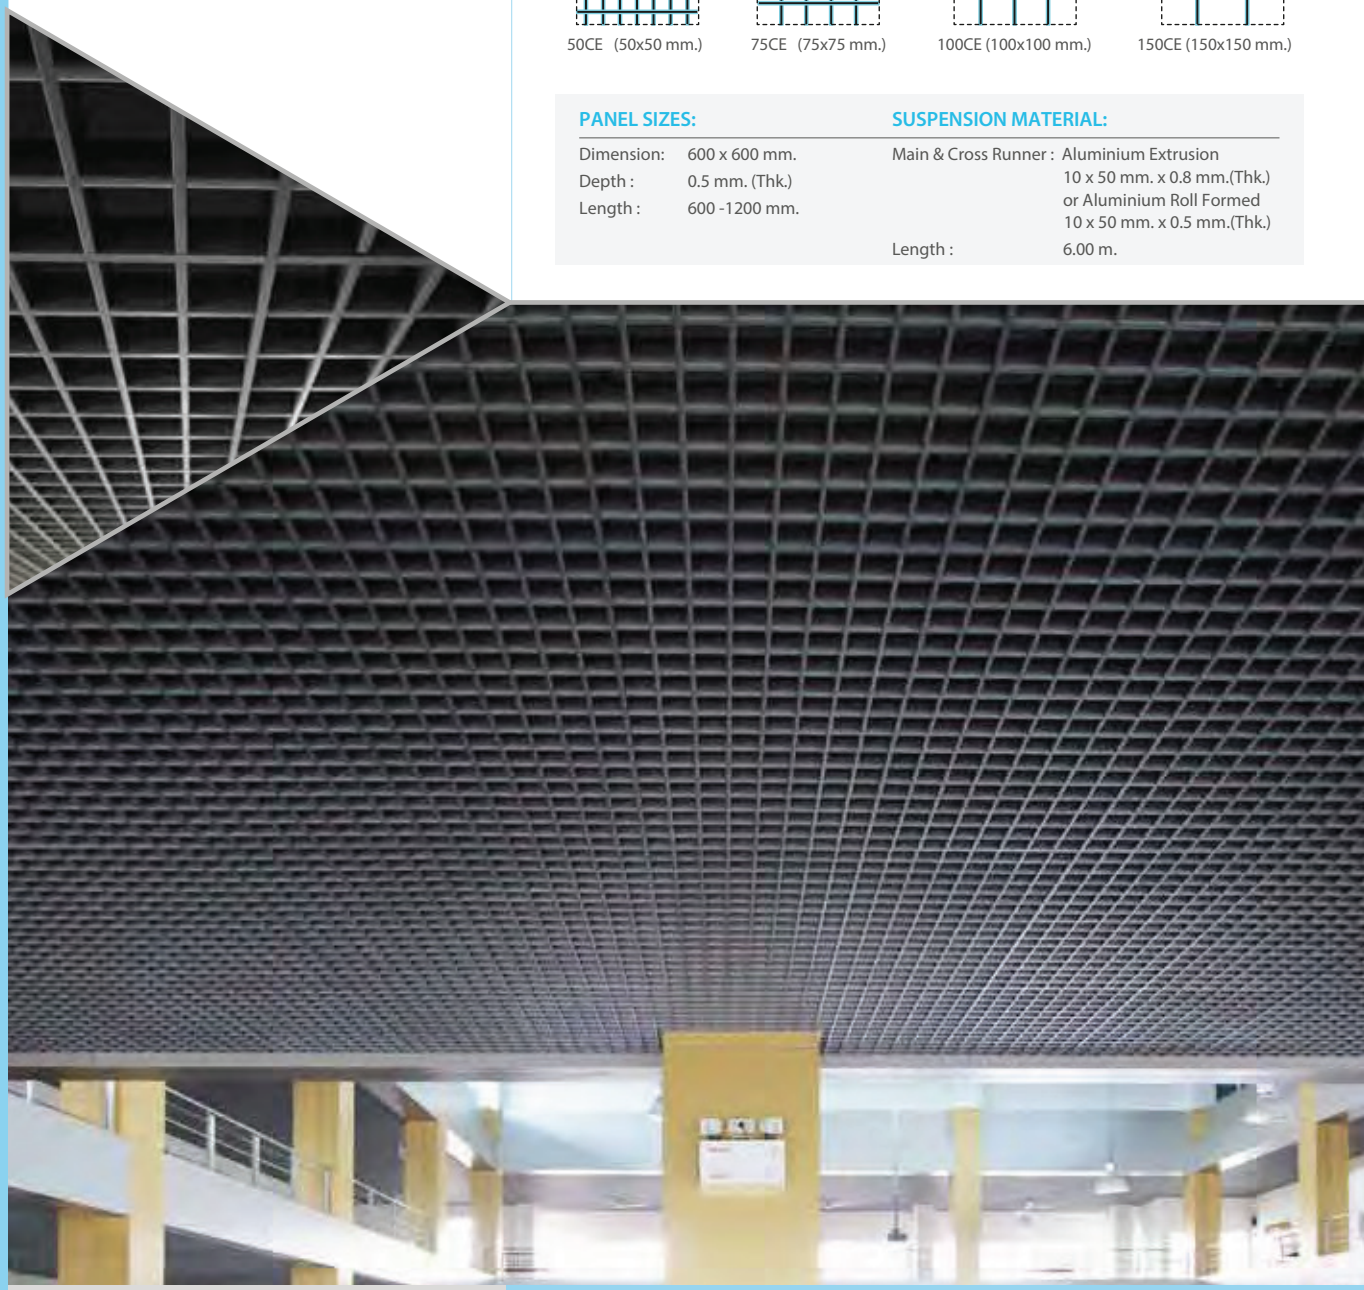

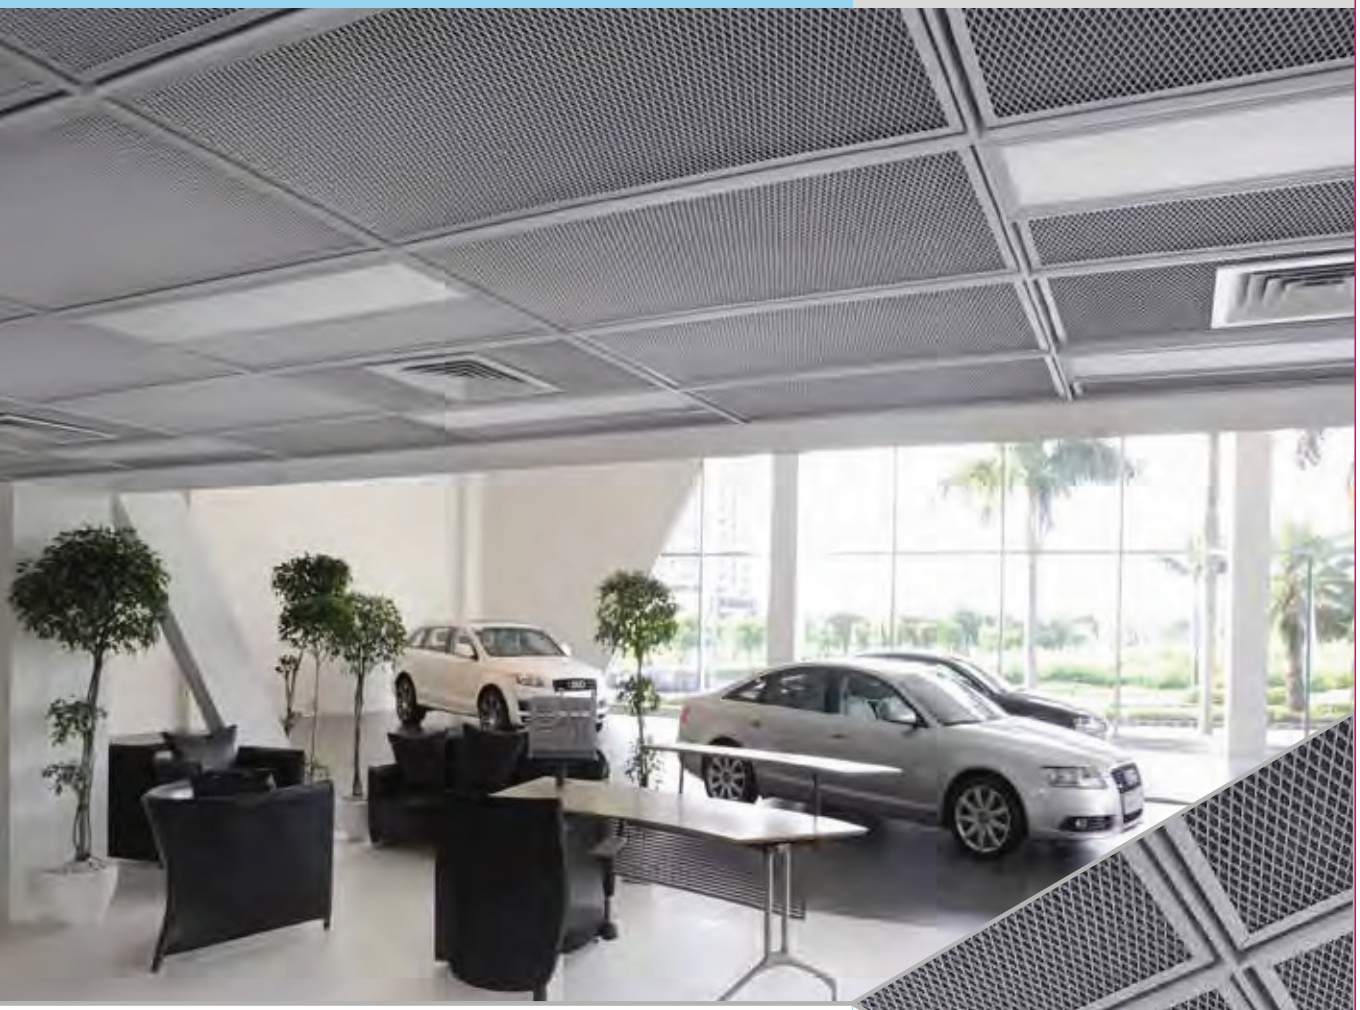



OPEN DECORATIVE *CEILING*

EXPANDED *CEILING*

SUSPENSION SYSTEM

Aluminium expanded ceiling with grit pattern. Each tile is installed in a square aluminium frame, easy for installation on the T-Bar structure, offering neat and beautiful look, quick installation, and easy maintenance. (Suggested areas: shopping malls, office building, large hall, interior corridor, exterior eaves)

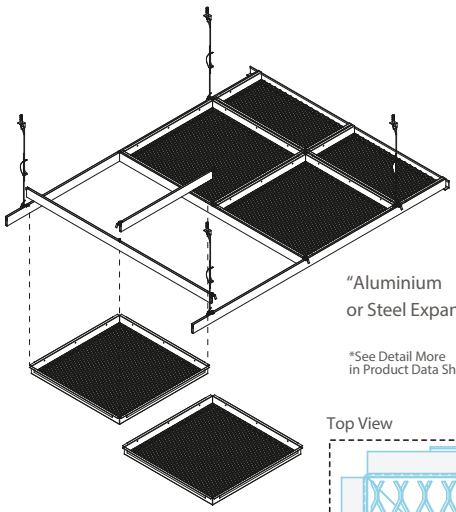

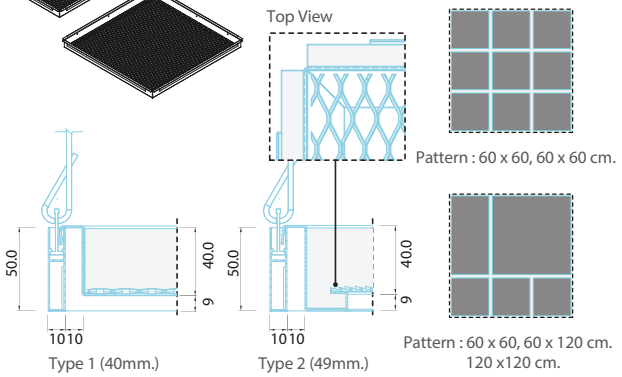

PANEL SIZES:

Dimension :	600 x 600, 600 x 1200 mm. 1200 x 1200 mm.
Expanded :	Gal. Steel 1.6 mm.(Thk.) Aluminium 2.0 mm.(Thk.)

SUSPENSION MATERIAL:

Main & Cross Runner :	Aluminium Extrusion 10x50 mm. x 0.8 mm.(Thk.)
Length :	6.00 m.


OPEN DECORATIVE *CEILING*

GRILLE


CEILING

SUSPENSION SYSTEM


Aluminum up-folded U-shaped open ceiling system. With lath-style arrangement, concealing the untidiness of the above ceiling services, this type of ceiling offers a wood lath look that brings a sense of nature to the area. With various optional sizes, the ceiling can be conveniently removed and installed, easy for checking and maintenance. (Suggested areas: shopping mall, office building, large hall, interior corridor, exterior eaves)

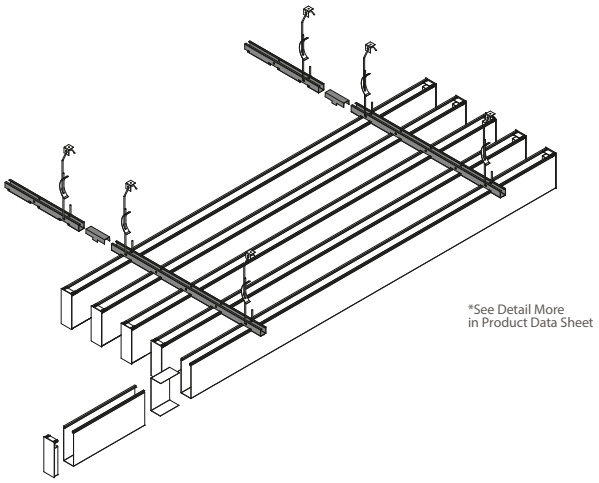

*See Detail More in Product Data Sheet

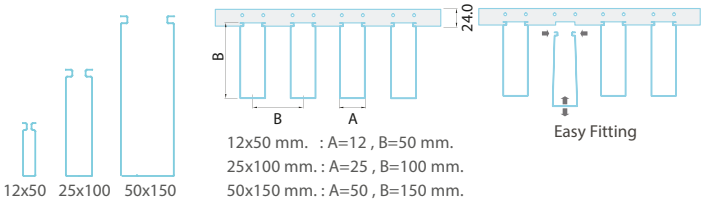

12x50 mm. : A=12 , B=50 mm.
25x100 mm. : A=25 , B=100 mm.
50x150 mm. : A=50 , B=150 mm.

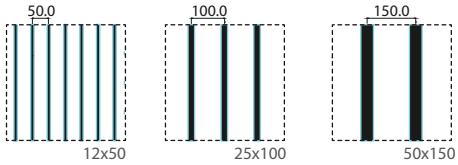


PANEL SIZES:

Dimension : 12 x 50, 25 x 100, 50 x 150 mm.
Thinkness : 0.5mm. (Thk.)
Length : Max. 3 m.

SUSPENSION MATERIAL:


Material : Galvanized Steel (0.5 mm. Thk.)
Length : 3.00 m.




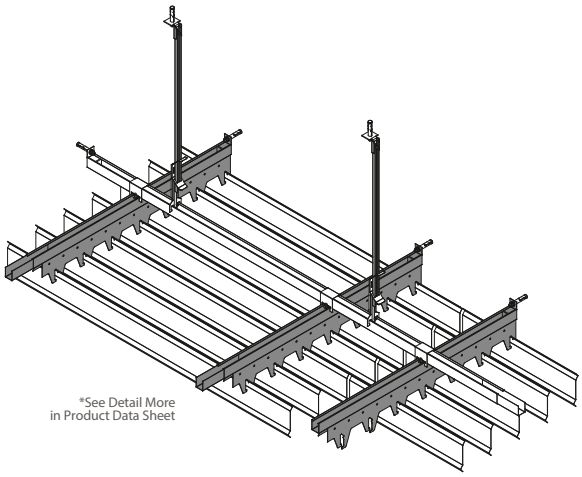

*See Detail More
in Product Data Sheet

"Vertical suspended aluminum
screen ceiling system"

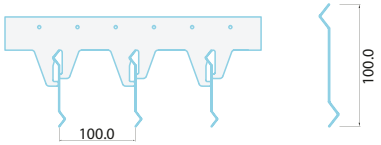



100SC



150SC



PANEL SIZES:

Thickness : 0.5 mm. is thickness. Depth is 100 mm.
Length : 6 m.

SUSPENSION MATERIAL:

Material : Aluminium (0.5 mm. Thk.)
Aluminium (0.9 mm. Thk.)
Length : 2.40 m.


OPEN DECORATIVE *CEILING*

SCREEN

CEILING

100SC/150SC

Aluminum screen Ceiling system with vertical design blade. This open,lath-style system can conceal the indelicacy of the systems above ceiling. This system enables the user to conceal lights above the tiles for beautiful and innovative indirect lighting of the room. (Suggested areas: interior corridor, exterior eaves)

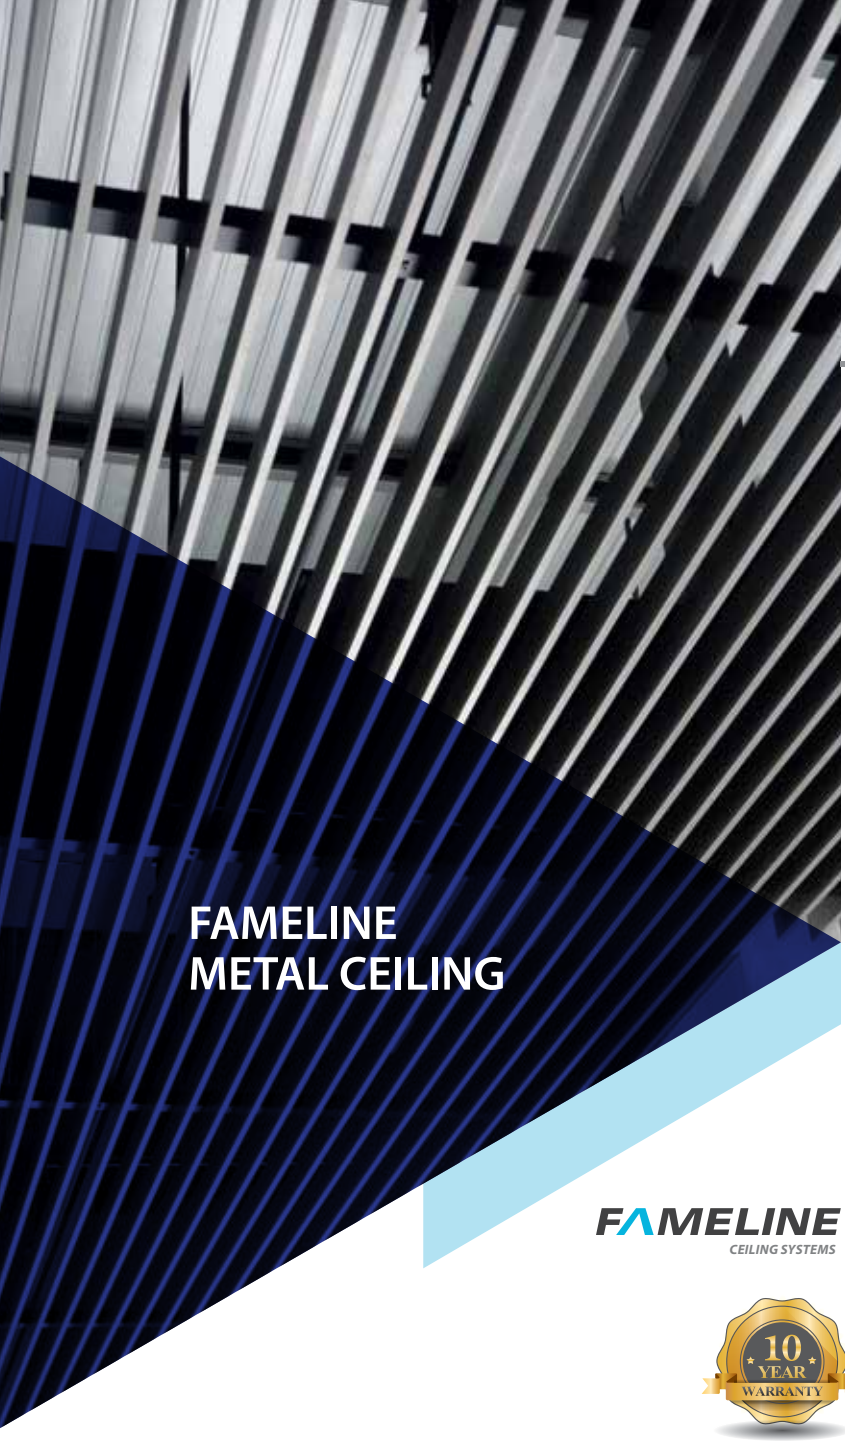

FAMELINE METAL CEILING

VALUE OF FAMELINE METAL CEILING

Metal Ceilings Colour Chart by Fameline

A range of high quality colours for metal ceiling products. Having passed the AAMA 2603-02 Standard Test, these polyester colours are durable and deliver years-long life. This colour range also comes with popular colour shades used by several designers. With the polish ratio of 10-14%, these shades are most suitable for indoor decoration.

Types of Colour System

• Coil Coating: A polyester paint precoated materials utilizing a continuous, automated process for coating materials before fabrication into ceiling products. The system gives a smooth and even surface with a minimal coating thickness tolerance. The system is suitable for roll form ceiling products such as linear, open cell, grille, and screen ceilings.

• Spray Painting: An electrostatically stove enamel acrylic based spray paint system. This coating system is flexible for any ceiling profiles even a small quantity production lot.

• Powder Coating: An electrostatically polyester based powder paint system. This coating system is flexible for any ceiling profiles while economical for large quantity production lot.

FAMELINE
CEILING SYSTEMS

10 YEAR WARRANTY

STANDARD:
AAMA 2603-02 *(BASIC PIGMENT COATING):*

Voluntary Specification, Performance Requirements and Test Procedures for Pigmented Organic Coatings on Aluminum Extrusions and Panels

TEST METHOD	STANDARDS	METAL CEILING (AAMA 2603)	PERFORMANCE
MINIMUM INITIAL DRY FILM THICKNESS			
Minimum Initial DFT	ASTM D6132	Minimum 17 µm	Complied
WEATHERING			
Color Retention	ASTM D2244	△E≤6	Complied
Specular Gloss	ASTM D523	not exceed 20%	Complied
FILM ADHESION			
Adhesion (Dry, Wet, Boil)	ASTM D3359	4B-5B	Complied
DRY FILM HARDNESS			
T-Bending	ASTM D4145	Minimum 2T	Complied
Pencil Hardness	ASTM D3363	Minimum HB	Complied
CORROSION RESISTANCE			
Impact Resistance	ASTM D2794	100% No film removal at initial test	Complied
SALT SPRAY RESISTANCE			
Salt Spray Resistance	ASTM B117	1,500 hrs	Complied

GLOSS LEVEL *RECOMMEND:*
10-14%

- **LINEAR** *CEILINGS*
- **TILE&PLANK** *CEILINGS*
- **OPEN DECORATIVE** *CEILINGS*

CERT.NO. AJA00/2412


SOLID *COLOUR*



SD-9102 *PURE WHITE*




SD-9101 *WHITE*




SD-9103 *OFF WHITE*




SD-9104 *IVORY WHITE*




SD-7102 *OFF GREY*

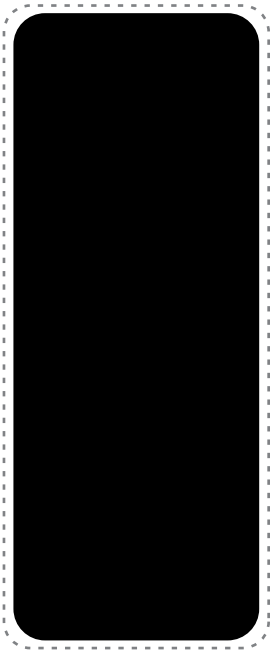

SD-9111 *MATT BLACK*



SD-7101 *BEIGE*



SD-8101 *DARK BROWN*

METALLIC *COLOUR*



MT-0113 *DARK GREY*



MT-0112 *SILVER*


WOODEN *COLOUR*



FWC-CC-02 *WALNUT*



FWC-CC-01 *MAHOGANY*

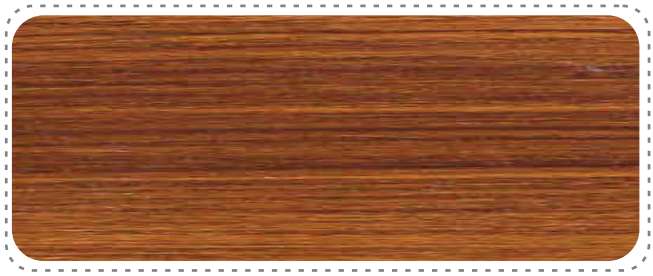

FWC-CC-03 *THAI TEAK*



FWC-CC-04 *BEECH*

INDONESIA
PT. Kencana Mirae Industri
Kawasan Ruko Business Park, Kebon Jeruk Blok I No.9
Jakarta Barat, DKI Jakarta 11620
T : (+62) 21 5890 8283 | E : support@kencanamirae.com
www.kencanamirae.com

KENCANA MIRAE INDUSTRI

FAMELINE
THE PROFESSIONALS' VISION